



APOLLO S-120AM

STAND ALONE INVERTER WITH MPPT SOLAR CHARGE CONTROLLER

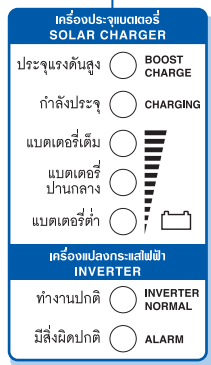

- High efficiency with microprocessor control
- Stable output voltage and frequency
- Full protection for overload and short circuit
- Automatic low battery shutdown to protect battery
- 10 A MPPT solar charger
- Quiet operation
- One touch operation
- Energy saving force air cooling fan
- Wall mounted type
- AS-3001 certified
- ISO 9001 and ISO 14001 certified

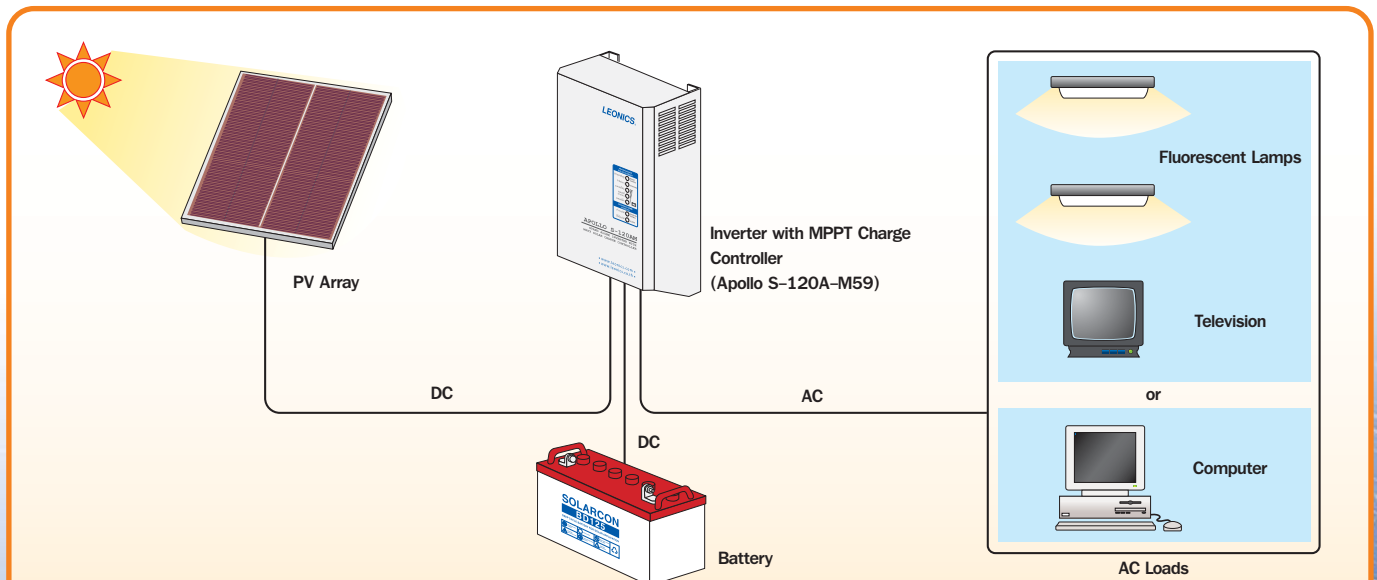

Solar home system is a stand-alone power generator system from solar energy, suitable for any areas where there is no utility power line. The system consists of charge controller and inverter in the same enclosure. The charge controller controls charging current from solar array to storage battery and the inverter converts DC from battery to AC to supply to loads. And built-in MPPT (Maximum Power Point Tracking) to maximize power generated by PV array.

This system is suitable for house, school or health center. It can use together with electrical equipments such as fluorescent lamp with electronic ballast, television, radio, computer and etc.

APOLLO S-120AM series

STAND ALONE INVERTER WITH MPPT SOLAR CHARGER

SPECIFICATIONS

MODEL			S-120A-M59
INPUT	Inverter mode	Nominal voltage	12 Vdc
		Voltage range	10 - 16 Vdc
	Charger mode	PV maximum voltage	92 Vdc
		MPPT tracking voltage	40 - 92 Vdc
OUTPUT	Inverter mode	Power continuous	150 VA/ 150 Watt
		Max. surge power	200% of continuous power
		Voltage	220 Vac – 3%
		Frequency	50 Hz – 0.1% (crystal control)
		Wave form	Modified sine wave
	Charger mode	Nominal voltage	12 Vdc
		Max. charge current	10 A
		SYSTEM	
Inverter maximum efficiency at full load Pf.= 1		> 80%	
Low battery disconnect		< 11.0 - 11.5 Volt pre-adjust	
PROTECTION		Over temperature / Overload / Short circuit / Reverse (PV) polarity / Transient voltage / Over charge / Over discharge	
INDICATOR	Solar Charger	Status	Boost charge (green) Charging (green)
		Battery level	Full Battery (green) Medium Battery (yellow) Low Battery (red)
			Inverter
	VENTILATION		Fan
ALARM		Buzzer	Low battery / Overload / Short circuit
OPERATING CONDITION		Temperature	0 - 45°C
		Relative humidity	0 - 95% (non - condensing)
DIMENSION		W x H x D (cm.)	16.5 x 29.5 x 9.6
WEIGHT		Approximate in kg.	5.9
DESIGN REGULATION		Safety regulation	AS 3100

Continuous product development is our commitment. In that manner, the above specifications may be changed without prior notice.

Authorized Distributor:

LEO ELECTRONICS CO.,LTD.

119/ 50-51 MOO 8 BANGNA-TRAD RD., BANGNA, BANGNA, BANGKOK 10260 THAILAND
Tel. 66-2746-9500, 66-2746-8708 Fax. 66-2746-8712
http://www.leonics.com e-mail: RNE@leonics.com

Authorized Dealer: