

SOLARCON SCB

SOLAR CHARGE CONTROLLER WITH MPPT




Wall mount case



Rack mount case

- Advanced microprocessor control
- Maximum Power Point Tracking (MPPT)
- Buck regulator wide input range
- 3-step charging to provide quick and safe charging for battery
- Reverse polarity protection for PV and battery
- Over charge and over discharge protection
- Lightning surge protection
- Automatic cooling fan (outside enclosure)
- Comprehensive LED indication and LCD display
- Power and event data logger
- Wall mount or Rack mount 6U and 7U Case
- ISO 9001:2000 and ISO 14001 certified

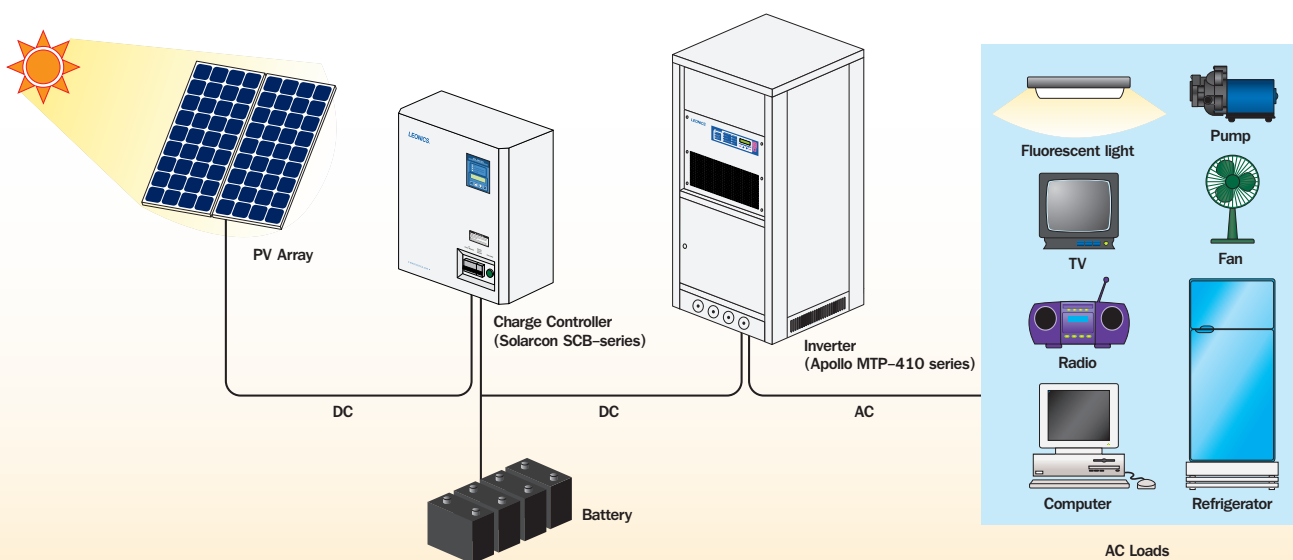

The SOLARCON SCB-series charger is the most sophisticated solar charger with PV Maximum Power Point Tracking (MPPT) algorithm. The charger equipped with advanced microprocessor control to get the maximum power from PV to charge battery with LCD display and front panel for easy and accurate setting more over the digital meter with 180 days power and event logger are inclusive.

SPECIFICATIONS

Wall Mount Model	SCB-2430	SCB-2460	SCB-24120	SCB-4840	SCB-4880	SCB-48120	SCB-9630	SCB-9660	SCB-96120	SCB-12030	SCB-12060	SCB-120120
Rack Mount Model	SCB-2430/RM	SCB-2460/RM	SCB-24120/RM	SCB-4840/RM	SCB-4880/RM	SCB-48120/RM	SCB-9630/RM	SCB-9660/RM	SCB-96120/RM	SCB-12030/RM	SCB-12060/RM	SCB-120120/RM

INPUT (Configuration of PV in series within these voltage range)

Vmp of PV at STC	60 - 120 Vdc	150 - 250 Vdc
Voc of PV at STC	≤ 150 Vdc	≤ 300 Vdc

OUTPUT (at 25°C)

Nominal battery voltage	24 Vdc	48 Vdc	96 Vdc	120 Vdc					
Boost charging voltage	26.0 - 30.0 Vdc (default = 30.0 Vdc)	52.0 - 60.0 Vdc (default = 60.0 Vdc)	104.0 - 120.0 Vdc (default = 120.0 Vdc)	130.0 - 150.0 Vdc (default = 150.0 Vdc)					
Floot charging voltage	24.0 - 28.0 Vdc (default = 27.6 Vdc)	48.0 - 56.0 Vdc (default = 55.2 Vdc)	96.0 - 112.0 Vdc (default = 110.4 Vdc)	120.0 - 140.0 Vdc (default = 138.0 Vdc)					
Low voltage alarm	20.0 - 24.0 Vdc (default = 23.6 Vdc)	40.0 - 48.0 Vdc (default = 47.2 Vdc)	80.0 - 96.0 Vdc (default = 94.4 Vdc)	100.0 - 120.0 Vdc (default = 118.0 Vdc)					
Low battery voltage disconnected	19.8 - 23.8 Vdc (default = 21.6 Vdc)	39.6 - 47.6 Vdc (default = 43.2 Vdc)	79.2 - 95.2 Vdc (default = 86.4 Vdc)	99.0 - 119.0 Vdc (default = 108.0 Vdc)					
Reconnect voltage	23.0 - 27.0 Vdc (default = 25.0 Vdc)	46.0 - 54.0 Vdc (default = 50.0 Vdc)	92.0 - 108.0 Vdc (default = 100.0 Vdc)	115.0 - 135.0 Vdc (default = 125.0 Vdc)					
Maximum charging current	30	60	120	30	60	120	30	60	120

BATTERY

Type	Deey cycle Lead Acid (LA)
------	---------------------------

PROTECTION

Protection	PV Transient voltage surge, PV and Battery Reverse polarity, High battery voltage, Low battery voltage. Over temperature, Overcharging
------------	--

INDICATOR

LED	Battery Level, PV Voltage Level, Operation Status, Alarm
LCD	Digital meter, 180 days power and event logger

COMMUNICATION INTERFACE

RS-232	DB-9 connection
RS-485	operate with RS-485 adaptor (option)
Digital I/O	DB-9 connection x 2 port (male and female) (option)
Dry contact signal	Charge fail and low battery voltage disconnected

SYSTEM

Control	Automatic cooling fan, Maximum Power Point Tracking (MPPT)
Temp. compensation range	-5 to 7 mV / cell / celsius (option)

OPERATING CONDITION

Temperature	0 - 45°C
Relative humidity	0 - 95 % (non-condensing)

DIMENSION (W x H x D) (approximate in cm.)

Wall mounted case	50 x 60 x 23											
Rack mount case	48.2 x 26.5 x 54 (6U)	68.2x31x64(7U)	48.2 x 26.5 x 54 (6U)	68.2x31x64(7U)	48.2x26.5x54(6U)	68.2 x 31 x 64 (7U)	48.2x26.5x54(6U)	68.2 x 31 x 64 (7U)				

WEIGHT (approximate in kg.)

Wall mounted case	depend on model
Rack mount case	depend on model

Continuous product development is our commitment. In that manner, the above specifications may be changed without prior notice.

Authorized Distributor:

LEO ELECTRONICS CO.,LTD.

119/50-51 MOO 8 BANGNA-TRAD RD., BANGNA, BANGNA, BANGKOK 10260 THAILAND.

Tel. 66-2746-9500, 66-2746-8708 Fax. 66-2746-8712

http://www.leonics.com • e-mail : RNE@leonics.com

Authorized Dealer: